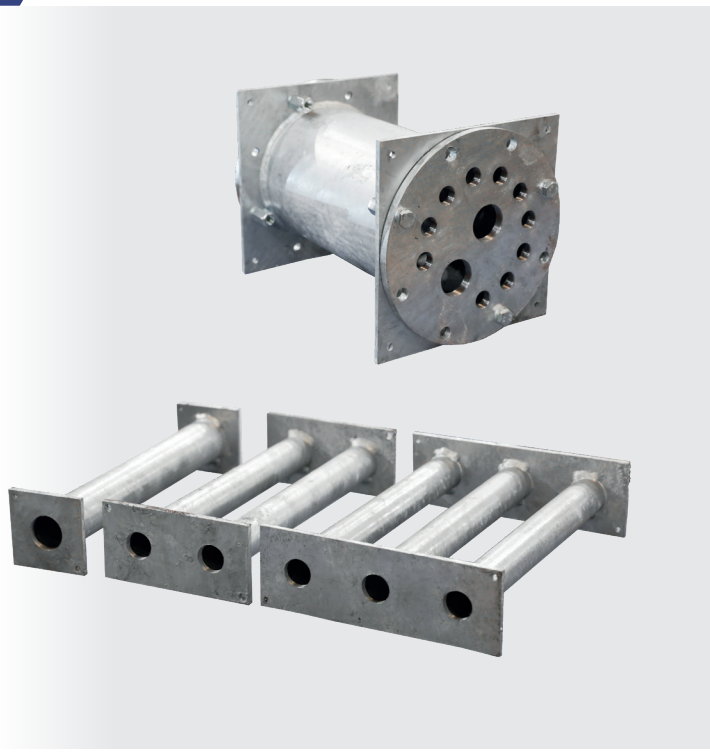
# Cable wall sleeve KL-160



## JTK Power Oy's wall sleeves are certified and compliant with regulations. The products are supplied galvanized.

**The product includes:**

A cast-part wall sleeve + cover type of choice (2pcs), along with gaskets and mounting screws.

The cover type can be selected from drawing 3ES9888.

## Quality Assurance

**VTT (Eurofins) Expert Services Oy has granted a certificate for the products:**

| | |
|---|---|
| KL-160 | VTT-C-1788-07 |

A quality control agreement (VTT-A-00095-17) exists between Eurofins Expert Services Oy and JTK Power Oy. This agreement ensures that the products are subject to continuous independent monitoring.

## Other cable wall sleeves

JTK Power Oy also manufactures cable wall sleeves for individual cables. These are more cost-effective when only a few cables need to be accommodated.

**Standard products:**

- KL-1/1 thread M32
- KL-1/2 and KL-1/3 thread M25
- Other combinations and thread sizes available on special order.

## Delivery

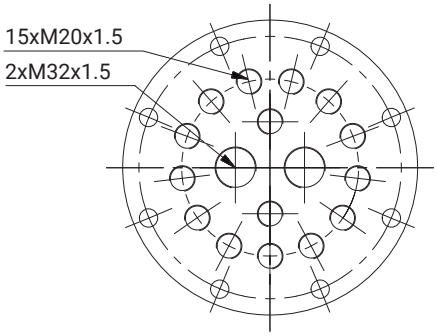
The wall sleeves are usually supplied as part of a door delivery or individually. Necessary mounting screws and gaskets are included in the delivery.

Cable glands and sealing plugs are not included.

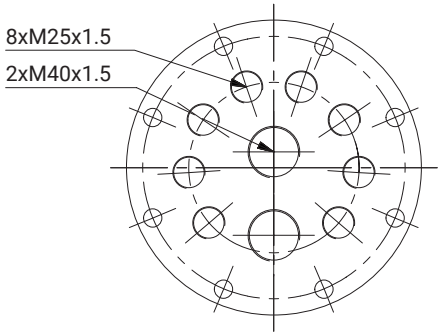
## Maintenance

The products are maintenance-free.

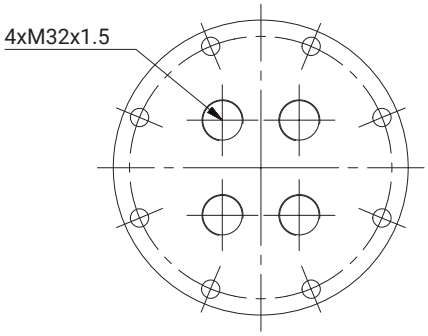
We reserve the right to make changes.



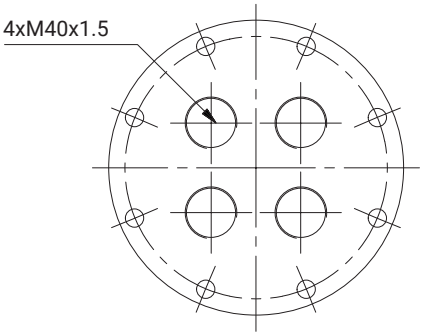

Cover JTK 1 (3-3415SJ)



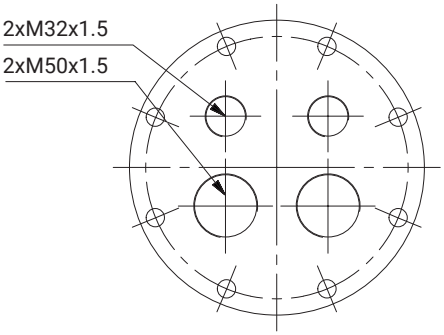

Cover JTK 2 (3-3413SJ)



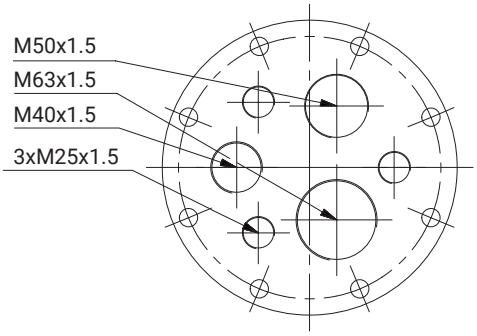

Cover JTK 3 (3-3065SJ)



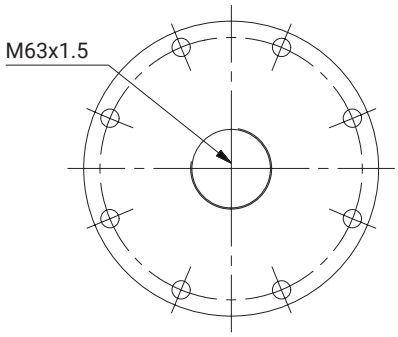

Cover JTK 4 (3-3483SJ)



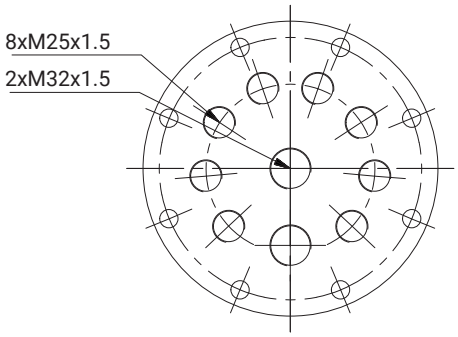

Cover JTK 5 (3-3484SJ)



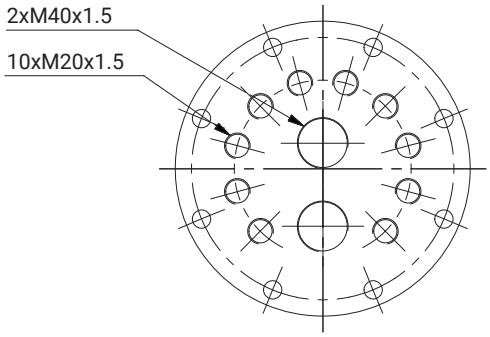

Cover JTK 6 (3-3485SJ)




Cover JTK 7 (3-3066SJ)




Cover JTK 8 (3-3490SJ)




Cover JTK 9 (4-06750)

| Cover | Item | Thread | pcs | Cable | pcs |
|---|---|---|---|---|---|
| JTK 1 | 3-3415SJ | M20x1.5 | 15 | ø5-14 | 15 |
| | | M32x1.5 | 2 | ø13-25 | 2 |
| JTK 2 | 3-3413SJ | M25x1.5 | 8 | ø9-18 | 8 |
| | | M40x1.5 | 2 | ø20-32 | 2 |
| JTK 3 | 3-3065SJ | M32x1.5 | 4 | ø13-25 | 4 |
| JTK 4 | 3-3483SJ | M40x1.5 | 4 | ø20-32 | 4 |
| JTK 5 | 3-3484SJ | M32x1.5 | 2 | ø13-25 | 2 |
| | | M50x1.5 | 2 | ø25-38 | 2 |
| JTK 6 | 3-3485SJ | M25x1.5 | 3 | ø9-18 | 3 |
| | | M40x1.5 | 1 | ø20-32 | 1 |
| | | M50x1.5 | 1 | ø25-38 | 1 |
| | | M63x1.5 | 1 | ø29-44 | 1 |
| JTK 7 | 3-3066SJ | M63x1.5 | 1 | ø29-44 | 1 |
| JTK 8 | 3-3490SJ | M25x1.5 | 8 | ø9-18 | 8 |
| | | M32x1.5 | 2 | ø13-25 | 2 |
| JTK 9 | 4-06750 | M20x1.5 | 10 | ø5-14 | 10 |
| | | M40x1.5 | 2 | ø20-32 | 2 |

**Blank:** 2-06749

**Surface treatment:**
Hot-dip galvanizing 70µm
SFS-EN ISO 1461

JTK Power Oy

safety@jtk-group.com
Teollisuustie 6
66600 VÖYRI, FINLAND
www.jtk-power-safety.com